TYPE Y750BH HYPRESS™ 10,000 PSI

12 TON REMOTE POWER OPERATED HYDRAULIC TOOL

CONDUCTOR RANGE:
#14-750 kcmil AL/CU
#4-556.5 kcmil ACSR

12 ton remote power operated hydraulic tool. The Y750BH HYPRESS incorporates a wide mouth (1.65") C-shaped head for all compression applications. The hook style head provides for easy tapping, splicing, and terminating of overhead lines as well as the full range of HYGROUND compression grounding system connectors, NEC cable connections and N30-N650 Navy cable applications.

All standard Burndy Y35 series U dies fit the Y750BH HYPRESS.

The Y750BH-2 has a permanently molded rubber head and includes a separate rubber molded boot that covers the lower body and hydraulic fitting for tool impact protection. Five year limited warranty

Patented

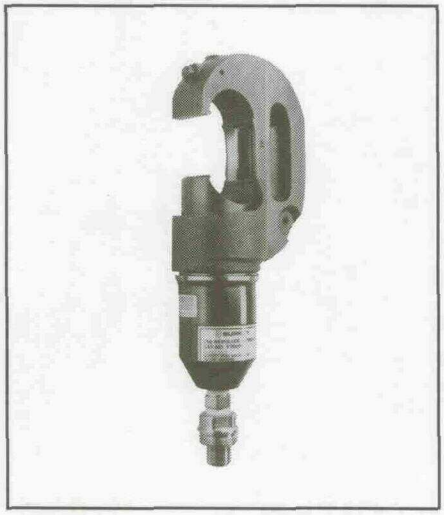

BENEFITS

- Covers a wide range of applications and provides easy tool removal from continuous conductors with it's C-shaped head. (1.65" opening)
- Easy die change out and retention within exposed positive die lock buttons.
- Uses all standard Burndy U-dies.
- Y750BH-2 provides molded rubber covering on head, body and hose fittings.
- Hot stick adapter sold separately.
- Infinitely rotatable head, so hydraulic couplers won't easily loosen.
- 5 year limited warranty.

SPECIFICATIONS

	Y750BH	Y750BH-2
Operating pressure:	10,000 PSI	10,000 PSI
Force developed:	12 tons	12 tons
Jaw opening:	1.65"	1.65"
Length:	12"	18.93" (includes boot)
Weight:	10.3 lbs.	11.8 lbs.
Head width:	4.43"	4.92"
Molded Covering:	—	Yes

FOR USE ON

- **Tension Sleeves**
  - Copper #8 sol-500 kcmil
  - Aluminum #6 sol.-587-2 kcmil
  - ACSR #4-556.5 kcmil
- **Taps**
  - Copper #14 solid 500 kcmil
  - Aluminum #6-500 kcmil
- **Aerial Cable**
  - Copper #6-500 kcmil
- **Terminals & Splices**
  - Aluminum #8-750 kcmil
  - Copper #8-750 kcmil
  - ACSR #4-556 kcmil
- **HYGROUND** (Compression Ground)
  - Copper #6-500 kcmil (cable/grd. rod)
  - Ground Rods 1/2 "-1" Diameter

ACCESSORIES:

Cat. No.
PT23484

Description:
Hot stick adapter.
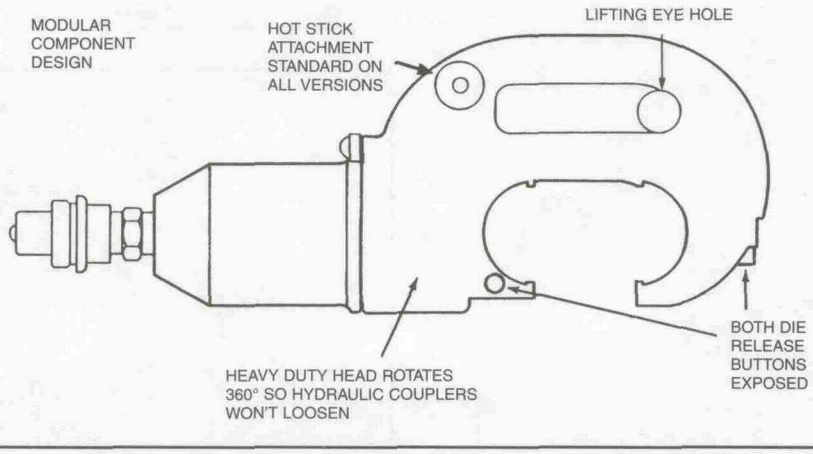
FEATURES