




CALL YOUR WOODHEAD REPRESENTATIVE TODAY!



SEE PAGES 2-7

SUPER-SAFEWAY® FLUORESCENT HAND LAMPS

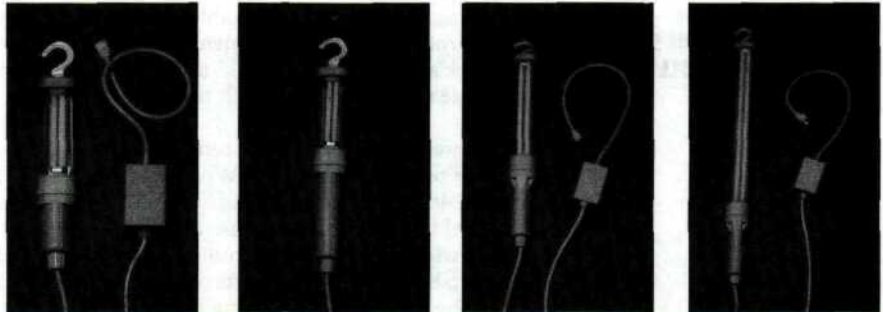

Description	13 Watt Hand Lamp with Switch	13 Watt Hand Lamp with Switch	27 Watt Hand Lamp with Switch	40 Watt Hand Lamp with Switch
Lumens	900	900	1800	3150
100W Incandescent Equivalent	60%	60%	110%	200%
120 Volt / 60 Hz AC w/ NEMA 5-15 Plug	25ft. Cord	1083-3	1086-3	1093-3
	25ft. w/GFCI	1083-3PLG	1086-3PLG	N/A
	50ft. Cord	1085-3	1087-3	1095-3
	50ft. w/GFCI	1085-3PLG	1087-3PLG	N/A
	Hand Lamp Only	1083-3HO¹	1086-3HO	N/A
110 Volt / 50 Hz AC w/IEC 316P4 16A Plug	25ft. Cord	1083-3-E	1086-3-E	1093-3-E
	50ft. Cord	1085-3-E	1087-3-E	1095-3-E
	Hand Lamp Only (W/ Switch)	1083-3EHON¹	1086-3EHO	N/A
230 Volt / 50 Hz AC w/IEC 316P6 16A Plug	25ft. Cord	1083-3-P	N/A	N/A
	50ft. Cord	1085-3-P	N/A	N/A
	Hand Lamp Only	1083-HO²	N/A	N/A
	Ballast Location	On Cord	In Handle	On Cord
	Fixture Length "L" (in./cm)	13.5 / 34.3	17.0 / 43.2	21.8 / 55.3
	Bulb Type	PL13/41	PL13/41	PL27/41
	Low Temp Start	32°F/0°C	32°F/0°C	32°F/0°C
	Cable Type — Primary	18/3 SJTW	16/3 SJT00W	18/3 SJT00W
	Cable Type — Secondary	18/2 SJT00W	N/A	18/6 SJT00W
Replacement Parts	Bulb	34-0390	34-0390	34-0130
	Shield Assembly	40-1040	40-1040	40-1020
	Nylon "Cap" Hook	70-1350	70-1350	70-1350
	Nylon "Handle" Hook	N/A	N/A	N/A

¹Ballast not included.

²12 Volt battery, 120 VAC charge.

³18ft. cord supplied.

Contact factory for non-switched versions.




CALL YOUR WOODHEAD REPRESENTATIVE TODAY!

SEE PAGES 2-7



SUPER-SAFEWAY® FLUORESCENT HAND LAMPS — DIMENSIONS: INCH(CM)

30 WATT BALLAST

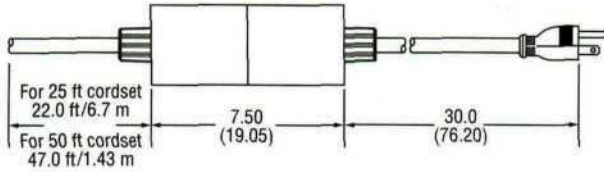

**1093-3, 1095-3/ 1097-3,
1099-3 27/ 40 WATT
HAND LAMPS**

	Dimension A Inch(cm)	Dimension B Inch(cm)
27 Watt	11.38(28.90)	21.75(55.25)
40 Watt	21.08(53.54)	31.45(79.88)

