




Cable Cutters CONT'D

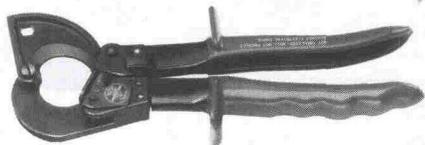

Ratcheting Cable Cutter

With one-hand, cleanly cut copper up to 400 MCM, and aluminum and multi-conductor cables up to 600 MCM. Unique ratchet-action holds cable tight and allows rapid, straight cuts with minimum effort. Hold-open spring speeds cutting action. Quick-release lever opens blade at any time during operation. Large, finger-formed handles have limit guards and plastic covering for comfortable, non-slip grip. Strong, light-weight tool can be locked in closed position for pouch carrying. **Not designed for cutting steel or ACSR.**


| Cat. No. | Length | MCM Cable-Cutting Capacity |
|----------|-----------------|--|
| 63060 | 10" (255 mm) | 400 Copper, 600 Aluminum and Multi-Conductor |



Utility Cable Cutter

Rugged, lightweight. Cuts soft copper and aluminum cable up to 350 MCM easily. Drop-forged steel with black oxide finish. Shear-type hook jaws grab and hold cable to make clean, even cuts. Beveled tips for positive mating. Hinge bolt with pinset nut for proper blade tension. Non-slip red vinyl grips. **Not designed for cutting steel or ACSR.**

| Cat. No. | Length | MCM Cable-Cutting Capacity |
|----------|--|-----------------------------|
| 63035 | 16 ³ / ₄ " (425 mm) | 350 Copper, 350 Aluminum |



Standard Cable Cutters


Economically priced, lightweight, yet efficient shear-type cable cutters. No. 63041 cuts soft cable up to 1³/₈" diameter (35 mm); see table for nominal MCM ratings. No. 63045 cuts soft cable up to 1³/₄" (44 mm); see table for nominal MCM ratings. Hook jaw shape forces cable into jaws. Exceptionally strong fiberglass handles with heavy vinyl grips for comfort and slip resistance. Heavy-duty pins in head serve as blade-stops. Jaws are of drop-forged alloy tool steel and are replaceable if damaged or worn out. Beveled tips assure positive mating, and hinge on a rugged bolt with a pinset nut to maintain proper blade tension. Make a clean, even cut for ease in fitting lugs and terminals. **Not designed for cutting steel or ACSR.**

| Cat. No. | MCM | | Approx. Weight |
|----------|-------------------------------|--|---|
| | Cable-Cutting Capacity | Overall Length | |
| 63041 | 500 Copper, 750 Aluminum | 25 ¹ / ₂ " (648 mm) | 4 ¹ / ₂ lbs (2 kg) |
| 63045 | 1000 Copper, 1200 Aluminum | 32" (813 mm) | 6 lbs (3 kg) |

Replacement Cable Cutter Heads (complete).

| Cat. No. | Fits Klein Cat. No. |
|----------|---------------------|
| 63081 | 63041 |
| 63090 | 63045 |

Ratcheting Cutter

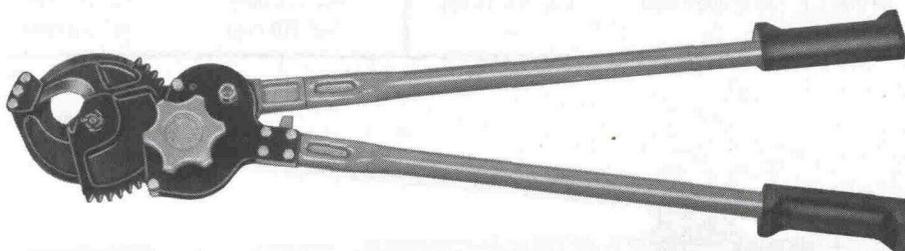


Heavy-Duty Ratcheting Cutter

The ratchet-action design of this cutter provides maximum leverage with minimum effort for severe-service use in cutting ACSR and ACAR, common guy strand, steel wire rope, steel rod (C.R.S. soft), and copper or aluminum cable. Features drop-forged, heat-treated, shear-type blades, plus a 36" long (914 mm) steel handle with heavy vinyl grips for comfort and slip-

resistance. The design incorporates a blade-advance knob which permits fast rotation of the blade to engage the cable or other material being cut, plus a quick-release mechanism which allows removal of the cable or rod before completion of the cut, if desired. **Not designed for cutting EHS Guy Strand or reinforcement rod.**

| Cat. No. | Cutting Capacity | Overall Length | Approx. Weight |
|----------|--|----------------|----------------|
| 63700 | 1 ¹ / ₄ " Dia. (32 mm) ACSR, ACAR 7 ¹ / ₁₆ " Dia. (11 mm) Common Guy Strand 5 ⁸ / ₁₆ " Dia. (16 mm) Steel Wire Rope 1 ¹ / ₂ " Dia. (13 mm) Steel Rod (C.R.S. SOFT) 750 MCM (1 ³ / ₈ " Dia.) (35 mm) Copper or Aluminum | 36" (914 mm) | 13 lbs. (6 kg) |

WARNING: Never use any pliers or cutters on live electrical circuits.



Communications Cable Cutter

Has similar shear-type design and features as standard cable cutters above, but will cut lead or rubber-covered, 900-pair soft copper and aluminum communications cable up to 2¹/₄" (57 mm) dia. **Not designed for cutting steel or ACSR.**

| Cat. No. | Communications Cable Cutting Capacity | Overall Length |
|----------|--|-----------------|
| 63047 | 900-pair soft copper and aluminum up to 2 ¹ / ₄ " (57 mm) dia. | 37" (940 mm) |

Replacement Cutter Head (complete)

| Cat. No. | Fits Klein No. |
|----------|----------------|
| 63110 | 63047 |